

TRAXTER[®]

SOLID FORKLIFT TYRES - PRIMO



Natural Rubber Compound
for cut resistance & cool running

4 Layer Construction with
Premium Tread
for high performance

Three Lug Design
for excellent traction & smooth ride


Large Contact Patch
for increased stability

Continuous Center Lug
for low rolling resistance & reduced vibration

Extra Deep Lug & Square Shoulders
for long life & stable ride

Rim Guard
for tyre & rim protection

Built Solid

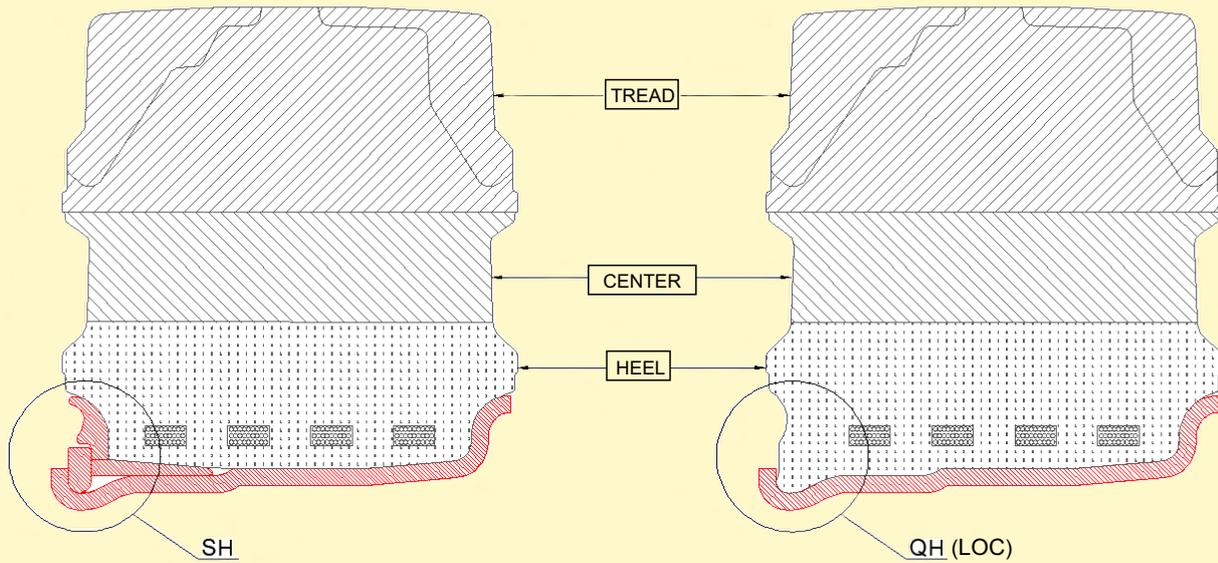

TECHNICAL SPECIFICATIONS

Size	Metric Size	Rim Width	Tread	Heel	△	Tyre Dimensions (+2%)mm				Load Capacity (Kg)	
						Overall Diameter	Section Width	Tread Width	Tread Depth	Load Wheel Upto 16Km/h	Steer Wheel Upto 25Km/h
15x4½-8	125/75-8	3.00	LUG	SH & QH	No	378	113	106	30	1040	945
5.00-8		3.00	LUG	SH & QH	No	454	118	104	44	1415	1090
18x7-8	180/70-8	4.33	LUG	SH & QH	Yes	454	154	138	50	2145	1650
	140/55-9	4.00	LUG	SH & QH	No	377	130	122	32	1140	875
6.00-9		4.00	LUG	SH & QH	Yes	524	133	119	59	1885	1450
21x8-9	200/75-9	6.00	LUG	SH & QH	Yes	517	183	164	52	2755	2120
6.50-10		5.00	LUG	SH & QH	Yes	567	157	140	64	2340	1800
7.00-12		5.00	LUG	SH & QH	Yes	649	166	148	64	2920	2240
8.15-15 (28x9-15)	225/75-15	7.00	LUG	SH & QH	Yes	687	221	198	64	3445	2650
8.25-15		6.50	LUG	SH & QH	Yes	808	210	185	78	4750	3650
8.25-16		6.50	LUG	SH & QH	Yes	810	206	185	78	4750	3650
250-15	250/70-15	7.00	LUG	SH & QH	Yes	719	218	196	68	4745	3650
250-15	250/70-15	7.50	LUG	SH & QH	Yes	719	218	196	68	4745	3650
300-15	315/70-15	8.00	LUG	SH & QH	Yes	813	251	223	84	5850	4500

DISCLAIMER OF ENDORSEMENT :

Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement or recommendation

For your requirements please contact -



www.tridentlatam.com

ventas@tridentlatam.com